

# ClassBuddy™ Wall

Installation Guide



LapSafe® 

2019 v2.0

# Introduction

Decide on a suitable location for your ClassBuddy™ Wall to be mounted. The unit must be fixed to a solid wall or directly to studs, if the unit is being fitted to a non-solid wall. The use of hollow wall or plaster board type fixings are not recommended. Allow space above and below the wall unit for ventilation.

Ensure that you check the wall prior to any drilling and fixing for electrical cables or other services that may be in the wall/void. Make sure the the unit is at an acceptable user height.

Select suitable fixings for the wall that you are fixing to and ensure that you use a minimum of 8 of the possible 16 fixing positions available. (Ensuring as even distribution as possible).

**IMPORTANT** Two persons are required to carry out the installation.

## Tools required

- Power or battery type drill (hammer required for solid walls)
- Drill-bit to suit your fixing type (refer to manufacturer's instructions)
- Pencil/Pen (to mark hole positions)
- Spirit level
- Hammer
- Screwdriver/Power Driver
- Vacuum cleaner

## Weight

28kg

## Step 1: Stand Up


Once unpacked, stand the unit up and ensure you have a clear working space around all sides.



Copyright Lapsafe® Self Service Solutions

## Step 2: Open Doors

Open the left hand side door with the white key, and then open the right hand side door with the blue key.

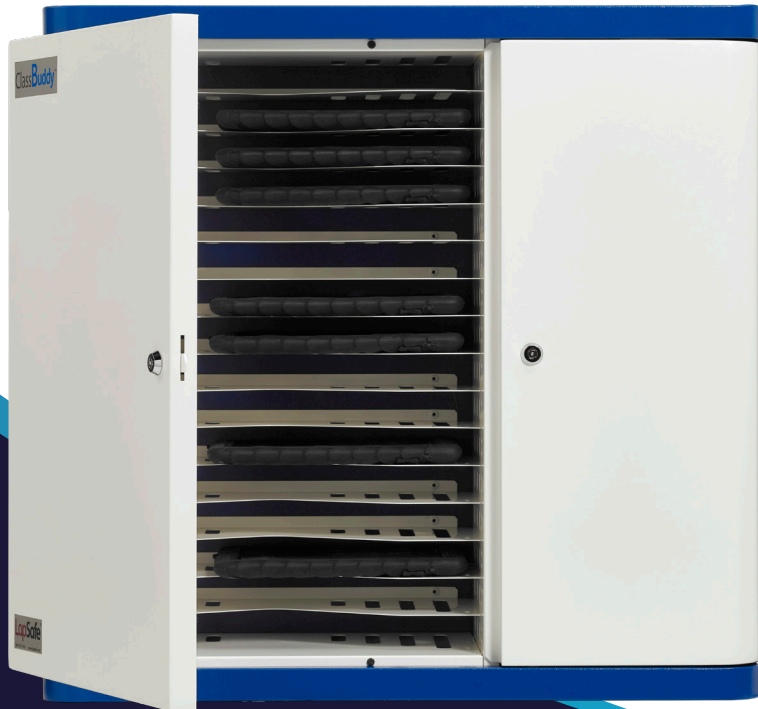

## Step 3: Unscrew holding nuts

On the bottom right hand side of the unit there are two holding nuts that need to be unscrewed, these are just finger tight. Once you have done this, lock the doors back up.



Holding Nuts

## Step 4: Unhook Mounting Bracket

Unhook the mounting bracket by tilting the ClassBuddy™ Wall forward and pushing the mounting bracket down.

1. Tilt Forward →


2. Push bracket ↓



## Step 5: Level The Mounting Bracket

Hold the mounting bracket up against the wall with the bottom lip facing towards you and use a spirit level to make sure the bracket is level on the wall and ensure the hanging slots are at the top.

You may need two people for this

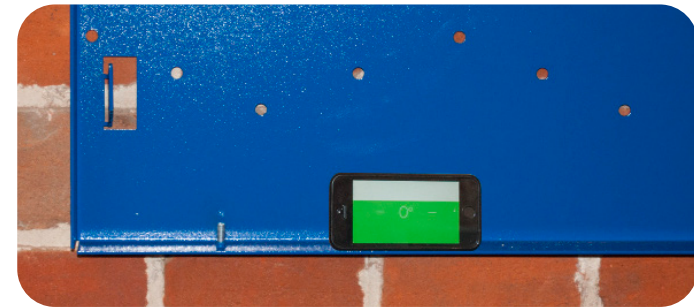

## Step 6: Mark Drill Holes

Use a pencil or marker to mark all the fixing holes then remove the Mounting Bracket.



## Step 7: Drill Holes

Drill the required holes for fixings in accordance with the manufacturer's instructions. Ensure an even distribution of fixings and use a minimum number of 8.



## Step 8: Insert Fixings

Fit fixings into place in accordance with the manufacturer's instructions.



## Step 9: Secure Mounting Bracket


Place the mounting bracket back onto the wall with the bottom lip facing towards you, and screw your fixings into place in accordance with the manufacturer's instructions.



## Step 10: Hook ClassBuddy™ Wall

Once the mounting bracket is secured lift the ClassBuddy™ Wall into place. There are six hooks along the sides that the unit slides onto.

Two people are required to lift the ClassBuddy™ Wall

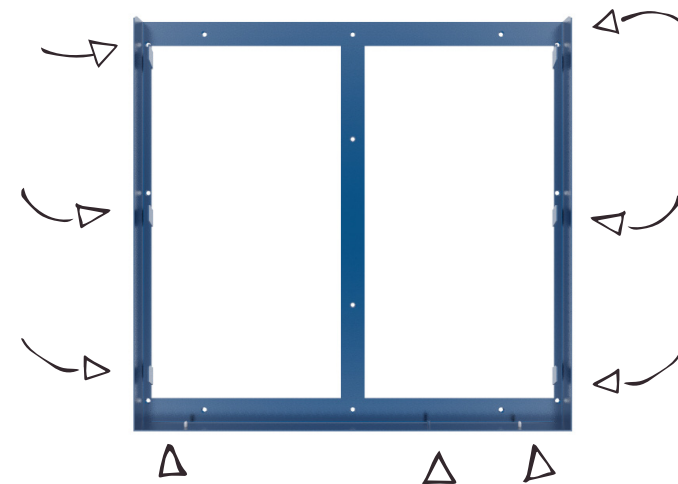

Ensure that ClassBuddy™ Wall is hooked on correctly and that the three lower studs are through the fixing holes before gently releasing the unit.

## Step 11: Secure

Once in place, open both doors again (Step 2) and screw the two holding nuts on to the studs that you removed in Step 3.



## Complete

Your new ClassBuddy™ Wall should now be successfully installed onto your wall and you are ready to load your cables and devices. Please refer to the user guide that is supplied with your ClassBuddy™ Wall for further information. Please read the Health and Safety guidance in the User Manual.

If you have any problems please do not hesitate to contact our support team.



### Support Enquiries

[lapsafe.com/support/enquiry](https://lapsafe.com/support/enquiry)

[support@lapsafe.com](mailto:support@lapsafe.com)

0800 130 3456



### Replacement Keys

[lapsafe.com/support/keys](https://lapsafe.com/support/keys)



**0800 130 3456**



**sales@lapsafe.com**



**lapsafe.com**



LapSafe® Self-Service Solutions Ltd

3 Wakes Hall Business Centre

Wakes Colne

Colchester

Essex

CO6 2DY

**LapSafe®** 